## 1 Solid Door Reach-In Refrigerator NP1R



Technical Specifications	
Product Classification	Refrigerator
Climate Class	Ν
Number of Doors	1
External Cabinet Material	430 Stainless Steel
Internal Cabinet Material	304 Stainless Steel
Type of Refrigeration Agent	R-290
Type of Temperature Control	Digital
Temperature Range °C	0°C to 5°C
Temperature Range °F	32°F to 41°F
Voltage / Frequency	115V / 60Hz
Amp	2.6
Compressor HP	1/5
Type of Insulation	2.5-Inch Polyurethane Foam
Door Handle	Full Length

### **Standard Features**

- Stainless steel series 430 exterior
- Stainless steel series 304 interior
- Stucco aluminum back panel
- Self closing hinged doors with 90 degree stay open feature
- Bottom mounted compressor
- Optional 3-inch legs
- LED digital temperature display
- PVC coated adjustable wire shelves
- Interior lighting
- Self contained system, simple plug installation
- Heavy-duty castor wheels

## Certified Safety Standard

• ETL Listed



ETL Sanitation Listed


## Warranty Information

• 5 Years Compressor





## 1 Solid Door Reach-In Refrigerator NP1R

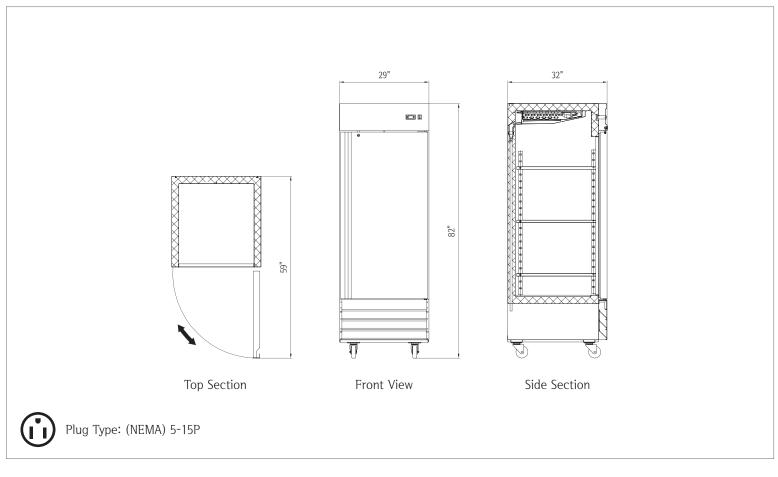

Capacity		
Capacity	23 cu. ft.	
Dimensions		
Internal Cabinet Width	24 in	
Internal Cabinet Depth	27 in	
Internal Cabinet Height	60 in	
External Width	29 in	
External Depth	32 in	
External Height	82 in	
Shipping Dimensions (W $\times$ D $\times$ H)	32 x 34 x 84 in	
Weight		
Gross Weight	333 lbs.	

	Accessories
Frost Free	Yes
Adjustable Shelves	3
Fixed Shelves	No
Internal Light	Yes
Internal Light Switch	No
External Light Switch	No
Self Closing Door/Lid	Yes
Door Holder for Loading	Yes
Door/Lid Lock	Yes
Reversable (Left) Door	Yes
Adjustable Feet	Optional
Adjustable Thermostat	Yes

## 1 Glass Door Reach-In Refrigerator • NP1R-G



### **Technical Specifications** Product Classification Refrigerator Climate Class Ν Number of Doors 1 External Cabinet Material 430 Stainless Steel Internal Cabinet Material 304 Stainless Steel R-290 Type of Refrigeration Agent Type of Temperature Control Digital 0°C to 5°C Temperature Range °C 32°F to 41°F Temperature Range °F Voltage / Frequency 115V / 60Hz Amp 2.6 1/5 Compressor HP Type of Insulation 2.5-Inch Polyurethane Foam Door Handle Full Length

### **Standard Features**

- Stainless steel series 430 exterior
- Stainless steel series 304 interior
- Stucco aluminum back panel
- Bottom mounted compressor
- Optional 3-inch legs
- LED digital temperature display
- PVC coated adjustable wire shelves
- Interior lighting
- Self contained system, simple plug installation
- Heavy-duty castor wheels

## Certified Safety Standard

• ETL Listed



ETL Sanitation Listed


### Warranty Information

• 5 Years Compressor





## 1 Glass Door Reach-In Refrigerator • NP1R-G

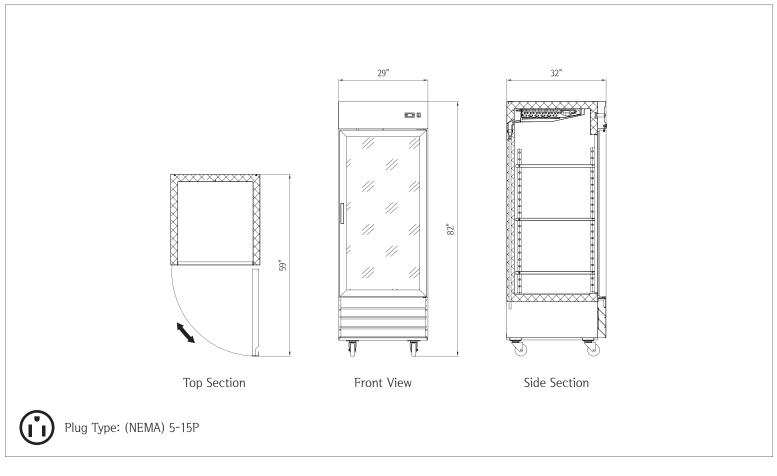

Capacity		
Capacity	23 cu. ft.	
Dimensions		
Internal Cabinet Width	24 in	
Internal Cabinet Depth	27 in	
Internal Cabinet Height	60 in	
External Width	29 in	
External Depth	32 in	
External Height	82 in	
Shipping Dimensions (W $x$ D $x$ H)	32 x 34 x 84 in	
Weight		
Gross Weight	333 lbs.	

Accessories
Yes
3
No
Yes
No
No
Yes
Yes
Yes
Yes
Optional
Yes

## 2 Solid Door Reach-In Refrigerator • NP2R



#### **Technical Specifications** Product Classification Refrigerator Climate Class Ν 2 Number of Doors External Cabinet Material 430 Stainless Steel Internal Cabinet Material 304 Stainless Steel R-290 Type of Refrigeration Agent Type of Temperature Control Digital 0°C to 5°C Temperature Range °C Temperature Range °F 32°F to 41°F Voltage / Frequency 115V / 60Hz Amp 3.8 1/4+ Compressor HP Type of Insulation 2.5-Inch Polyurethane Foam Door Handle Full Length

### **Standard Features**

- Stainless steel series 430 exterior
- Stainless steel series 304 interior
- Stucco aluminum back panel
- Self closing hinged doors with 90 degree stay open feature
- Bottom mounted compressor
- Optional 3-inch legs
- LED digital temperature display
- PVC coated adjustable wire shelves
- Interior lighting
- Self contained system, simple plug installation
- Heavy-duty castor wheels

## Certified Safety Standard

• ETL Listed



ETL Sanitation Listed

### Warranty Information


• 5 Years Compressor



3 Year Parts & Labor



## 2 Solid Door Reach-In Refrigerator NP2R

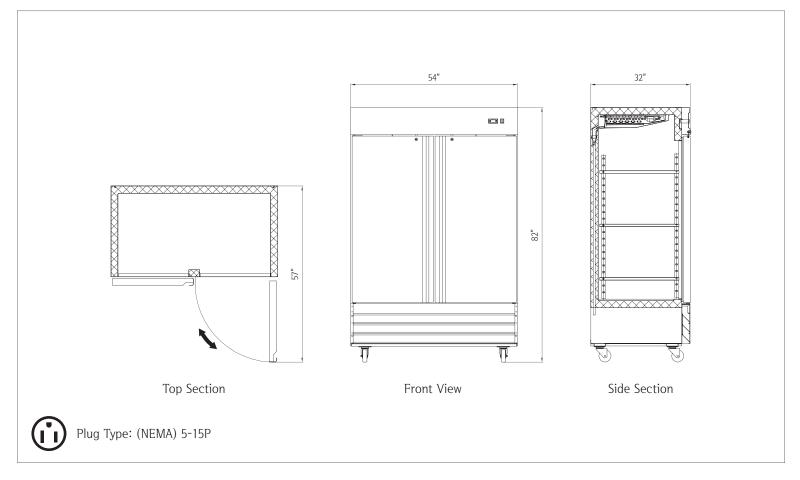

Capacity		
Capacity	48 cu. ft.	
Dimensions		
Internal Cabinet Width	49 in	
Internal Cabinet Depth	27 in	
Internal Cabinet Height	60 in	
External Width	54 in	
External Depth	32 in	
External Height	82 in	
Shipping Dimensions (W $\times$ D $\times$ H)	57 x 34 x 84 in	
Weight		
Gross Weight	513 lbs.	

	Accessories
Frost Free	Yes
Adjustable Shelves	6
Fixed Shelves	No
Internal Light	Yes
Internal Light Switch	No
External Light Switch	No
Self Closing Door/Lid	Yes
Door Holder for Loading	Yes
Door/Lid Lock	Yes
Reversable (Left) Door	Yes
Adjustable Feet	Optional
Adjustable Thermostat	Yes

## 2 Glass Door Reach-In Refrigerator • NP2R-G



### Standard Features

- Stainless steel series 430 exterior
- Stainless steel series 304 interior
- Stucco aluminum back panel
- Bottom mounted compressor
- Optional 3-inch legs
- LED digital temperature display
- PVC coated adjustable wire shelves
- Interior lighting
- Self contained system, simple plug installation
- Heavy-duty castor wheels

## Certified Safety Standard

• ETL Listed



• ETL Sanitation Listed

## Warranty Information


• 5 Years Compressor



3 Year Parts & Labor

### **Technical Specifications** Product Classification Refrigerator Climate Class Ν 2 Number of Doors External Cabinet Material 430 Stainless Steel Internal Cabinet Material 304 Stainless Steel R-290 Type of Refrigeration Agent Type of Temperature Control Digital 0°C to 5°C Temperature Range °C Temperature Range °F 32°F to 41°F Voltage / Frequency 115V / 60Hz Amp 4.3 1/4+ Compressor HP Type of Insulation 2.5-Inch Polyurethane Foam Door Handle Full Length

## 2 Glass Door Reach-In Refrigerator • NP2R-G

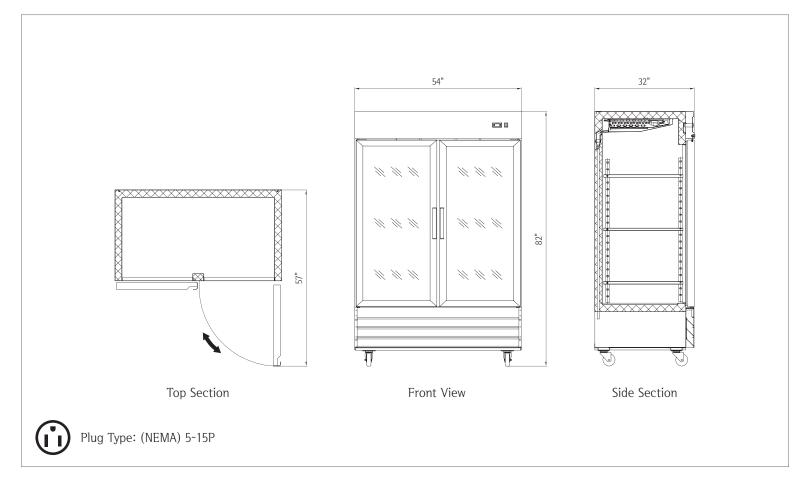

Capacity		
Capacity	48 cu. ft.	
Dimensions		
Internal Cabinet Width	49 in	
Internal Cabinet Depth	27 in	
Internal Cabinet Height	60 in	
External Width	54 in	
External Depth	32 in	
External Height	82 in	
Shipping Dimensions (W $x$ D $x$ H)	57 x 34 x 84 in	
Weight		
Gross Weight	513 lbs.	

	Accessories
Frost Free	Yes
Adjustable Shelves	6
Fixed Shelves	No
Internal Light	Yes
Internal Light Switch	No
External Light Switch	No
Self Closing Door/Lid	Yes
Door Holder for Loading	Yes
Door/Lid Lock	Yes
Reversable (Left) Door	Yes
Adjustable Feet	Optional
Adjustable Thermostat	Yes

## 3 Solid Door Reach-In Refrigerator • NP3R



Technical Specifications	
Product Classification	Refrigerator
Climate Class	Ν
Number of Doors	3
External Cabinet Material	430 Stainless Steel
Internal Cabinet Material	304 Stainless Steel
Type of Refrigeration Agent	R-290
Type of Temperature Control	Digital
Temperature Range °C	0°C to 5°C
Temperature Range °F	32°F to 41°F
Voltage / Frequency	115V / 60Hz
Amp	9.0
Compressor HP	3/4
Type of Insulation	2.5-Inch Polyurethane Foam
Door Handle	Full Length

### **Standard Features**

- Stainless steel series 430 exterior
- Stainless steel series 304 interior
- Stucco aluminum back panel
- Self closing hinged doors with 90 degree stay open feature
- Bottom mounted compressor
- Optional 3-inch legs
- LED digital temperature display
- PVC coated adjustable wire shelves
- Interior lighting
- Self contained system, simple plug installation
- Heavy-duty castor wheels

## Certified Safety Standard

• ETL Listed



ETL Sanitation Listed


## Warranty Information

• 5 Years Compressor





## 3 Solid Door Reach-In Refrigerator • NP3R

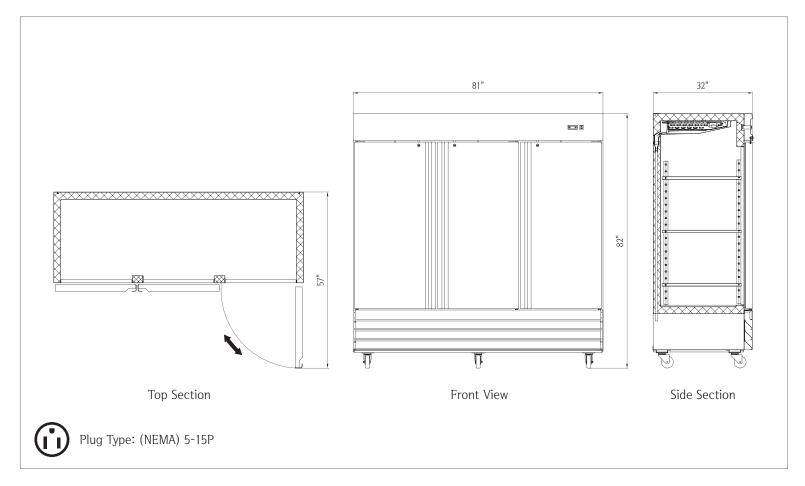

Capacity		
Capacity	72 cu. ft.	
Dimensions		
Internal Cabinet Width	76 in	
Internal Cabinet Depth	27 in	
Internal Cabinet Height	60 in	
External Width	81 in	
External Depth	32 in	
External Height	82 in	
Shipping Dimensions (W $x$ D $x$ H)	83 x 34 x 84 in	
Weight		
Gross Weight	690 lbs.	

	Accessories
Frost Free	Yes
Adjustable Shelves	9
Fixed Shelves	No
Internal Light	Yes
Internal Light Switch	No
External Light Switch	No
Self Closing Door/Lid	Yes
Door Holder for Loading	Yes
Door/Lid Lock	Yes
Reversable (Left) Door	Yes
Adjustable Feet	Optional
Adjustable Thermostat	Yes

## 1 Solid Door Reach-In Freezer NP1F



Technical Speci	fications
Product Classification	Freezer
Climate Class	Ν
Number of Doors	1
External Cabinet Material	430 Stainless Steel
Internal Cabinet Material	304 Stainless Steel
Type of Refrigeration Agent	R-290
Type of Temperature Control	Digital
Temperature Range °C	-22°C to -18°C
Temperature Range °F	-8°F to 0°F
Voltage / Frequency	115V / 60Hz
Amp	7.1
Compressor HP	1/2+
Type of Insulation	2.5-Inch Polyurethane Foam
Door Handle	Full Length

### **Standard Features**

- Stainless steel series 430 exterior
- Stainless steel series 304 interior
- Stucco aluminum back panel
- Self closing hinged doors with 90 degree stay open feature
- Bottom mounted compressor
- Optional 3-inch legs
- LED digital temperature display
- PVC coated adjustable wire shelves
- Interior lighting
- Self contained system, simple plug installation
- Heavy-duty castor wheels

## **Certified Safety Standard**

ETL Listed



• ETL Sanitation Listed


## Warranty Information

5 Years Compressor



- 3 Year Parts & Labor

## 1 Solid Door Reach-In Freezer • NP1F

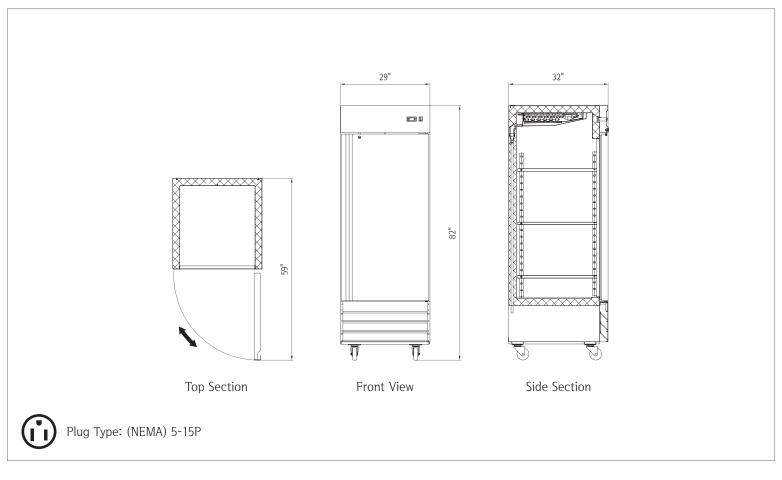

Capacity		
Capacity	23 cu. ft.	
Dimensions		
Internal Cabinet Width	24 in	
Internal Cabinet Depth	27 in	
Internal Cabinet Height	60 in	
External Width	29 in	
External Depth	32 in	
External Height	82 in	
Shipping Dimensions (W x D x H)	32 x 34 x 84 in	
Weight		
Gross Weight	340 lbs.	

1	Accessories
Cycle Defrosting	Yes
Frost Free	Yes
Adjustable Shelves	3
Fixed Shelves	No
Internal Light	Yes
Internal Light Switch	No
External Light Switch	No
Self Closing Door/Lid	Yes
Door Holder for Loading	Yes
Door/Lid Lock	Yes
Reversable (Left) Door	Yes
Adjustable Feet	Optional
Adjustable Thermostat	Yes

## 1 Glass Door Reach-In Freezer • NP1F-G



#### **Technical Specifications** Product Classification Freezer Climate Class Ν Number of Doors 1 External Cabinet Material 430 Stainless Steel Internal Cabinet Material 304 Stainless Steel R-290 Type of Refrigeration Agent Type of Temperature Control Digital -22°C to -18°C Temperature Range °C $-7^{\circ}F$ to $0^{\circ}F$ Temperature Range °F Voltage / Frequency 115V / 60Hz Amp 7.68 3/4 Compressor HP Type of Insulation 2.5-Inch Polyurethane Foam Door Handle Full Length

### **Standard Features**

- Stainless steel series 430 exterior
- Stainless steel series 304 interior
- Stucco aluminum back panel
- Bottom mounted compressor
- Optional 3-inch legs
- LED digital temperature display
- PVC coated adjustable wire shelves
- Interior lighting
- Self contained system, simple plug installation
- Heavy-duty castor wheels

## Certified Safety Standard

• ETL Listed



ETL Sanitation Listed


### Warranty Information

• 5 Years Compressor



3 Year Parts & Labor

## 1 Glass Door Reach-In Freezer • NP1F-G

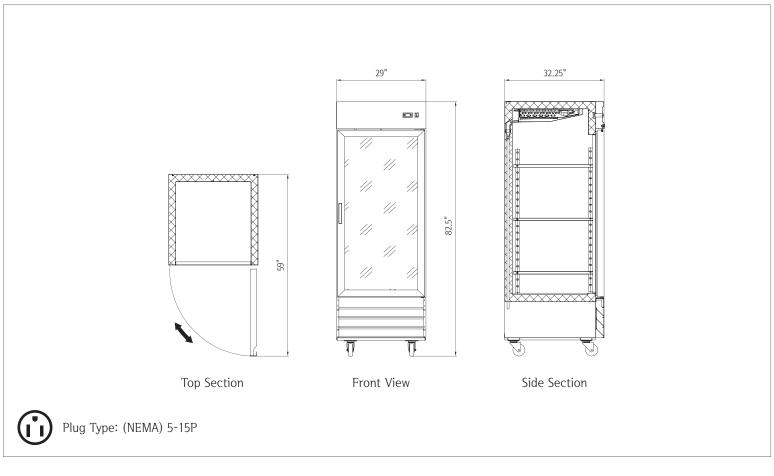

Capacity		
Capacity	23 cu. ft.	
Dimensions		
Internal Cabinet Width	24 in	
Internal Cabinet Depth	27 in	
Internal Cabinet Height	60 in	
External Width	29 in	
External Depth	32 in	
External Height	82 in	
Shipping Dimensions (W $\times$ D $\times$ H)	31 x 35 x 83 in	
Weight		
Gross Weight	368 lbs.	

	Accessories
Frost Free	Yes
Adjustable Shelves	3
Fixed Shelves	No
Internal Light	Yes
Internal Light Switch	No
External Light Switch	No
Self Closing Door/Lid	Yes
Door Holder for Loading	Yes
Door/Lid Lock	Yes
Reversable (Left) Door	Yes
Adjustable Feet	Optional
Adjustable Thermostat	Yes

## 2 Solid Door Reach-In Freezer • NP2F



#### **Technical Specifications** Product Classification Freezer Ν Climate Class Number of Doors 2 External Cabinet Material 430 Stainless Steel Internal Cabinet Material 304 Stainless Steel R-290 Type of Refrigeration Agent Type of Temperature Control Digital -22°C to -18°C Temperature Range °C -8°F to 0°F Temperature Range °F Voltage / Frequency 115V / 60Hz Amp 10.7 1 Compressor HP Type of Insulation 2.5-Inch Polyurethane Foam Door Handle Full Length

### **Standard Features**

- Stainless steel series 430 exterior
- Stainless steel series 304 interior
- Stucco aluminum back panel
- Self closing hinged doors with
  90 degree stay open feature
- Bottom mounted compressor
- Optional 3-inch legs
- LED digital temperature display
- PVC coated adjustable wire shelves
- Interior lighting
- Self contained system, simple plug installation
- Heavy-duty castor wheels

## Certified Safety Standard

ETL Listed




ETL Sanitation Listed

## Warranty Information

• 5 Years Compressor



## 2 Solid Door Reach-In Freezer • NP2F

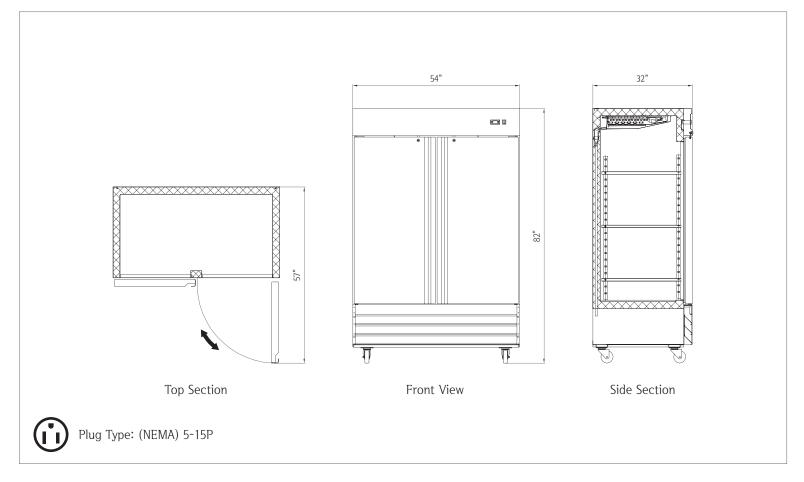

Capacity		
Capacity	48 cu. ft.	
Dimensions		
Internal Cabinet Width	49 in	
Internal Cabinet Depth	27 in	
Internal Cabinet Height	60 in	
External Width	54 in	
External Depth	32 in	
External Height	82 in	
Shipping Dimensions (W $\times$ D $\times$ H)	57 x 34 x 84 in	
Weight		
Gross Weight	526 lbs.	

A	ccessories
Cycle Defrosting	Yes
Frost Free	Yes
Adjustable Shelves	6
Fixed Shelves	No
Internal Light	Yes
Internal Light Switch	No
External Light Switch	No
Self Closing Door/Lid	Yes
Door Holder for Loading	Yes
Door/Lid Lock	Yes
Reversable (Left) Door	Yes
Adjustable Feet	Optional
Adjustable Thermostat	Yes

## 2 Glass Door Reach-In Freezer • NP2F-G



#### **Technical Specifications** Product Classification Freezer Ν Climate Class Number of Doors 2 External Cabinet Material 430 Stainless Steel Internal Cabinet Material 304 Stainless Steel R-290 Type of Refrigeration Agent Type of Temperature Control Digital -22°C to -18°C Temperature Range °C -7°F to 0°F Temperature Range °F Voltage / Frequency 115V / 60Hz Amp 11.2 1 Compressor HP Type of Insulation 2.5-Inch Polyurethane Foam Door Handle Full Length

### **Standard Features**

- Stainless steel series 430 exterior
- Stainless steel series 304 interior
- Stucco aluminum back panel
- Self closing hinged doors with 90 degree stay open feature
- Bottom mounted compressor
- Optional 3-inch legs
- LED digital temperature display
- PVC coated adjustable wire shelves
- Interior lighting
- Self contained system, simple plug installation
- Heavy-duty castor wheels

## Certified Safety Standard

• ETL Listed



ETL Sanitation Listed


### Warranty Information

• 5 Years Compressor



3 Year Parts & Labor

## 2 Glass Door Reach-In Freezer • NP2F-G

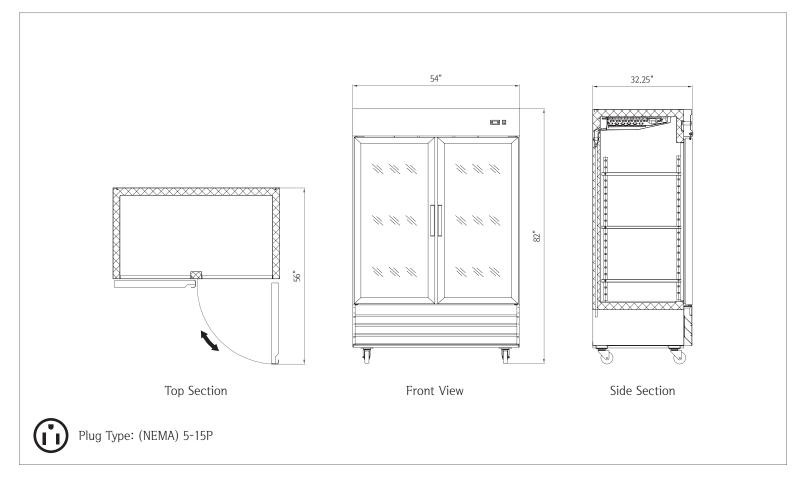

Capacity	
Capacity	48 cu. ft.
Dimensions	
Internal Cabinet Width	49 in
Internal Cabinet Depth	27 in
Internal Cabinet Height	60 in
External Width	54 in
External Depth	32 in
External Height	82 in
Shipping Dimensions (W $\times$ D $\times$ H)	56 x 35 x 83 in
Weight	
Gross Weight	574 lbs.

	Accessories
Frost Free	Yes
Adjustable Shelves	6
Fixed Shelves	No
Internal Light	Yes
Internal Light Switch	No
External Light Switch	No
Self Closing Door/Lid	Yes
Door Holder for Loading	Yes
Door/Lid Lock	Yes
Reversable (Left) Door	Yes
Adjustable Feet	Optional
Adjustable Thermostat	Yes

## 3 Solid Door Reach-In Freezer • NP3F



Technical Specifications		
	Product Classification	Freezer
	Climate Class	Ν
	Number of Doors	3
	External Cabinet Material	430 Stainless Steel
	Internal Cabinet Material	304 Stainless Steel
	Type of Refrigeration Agent	R-290
	Type of Temperature Control	Digital
	Temperature Range °C	-22°C to -18°C
	Temperature Range °F	-8°F to 0°F
	Voltage / Frequency	115V / 60Hz
	Amp	13.5
	Compressor HP	1-1/4
	Type of Insulation	2.5-Inch Polyurethane Foam
	Door Handle	Full Length

### **Standard Features**

- Stainless steel series 430 exterior
- Stainless steel series 304 interior
- Stucco aluminum back panel
- Self closing hinged doors with
  90 degree stay open feature
- Bottom mounted compressor
- Optional 3-inch legs
- LED digital temperature display
- PVC coated adjustable wire shelves
- Interior lighting
- Self contained system, simple plug installation
- Heavy-duty castor wheels

## Certified Safety Standard

• ETL Listed




ETL Sanitation Listed

## Warranty Information

• 5 Years Compressor



## 3 Solid Door Reach-In Freezer • NP3F

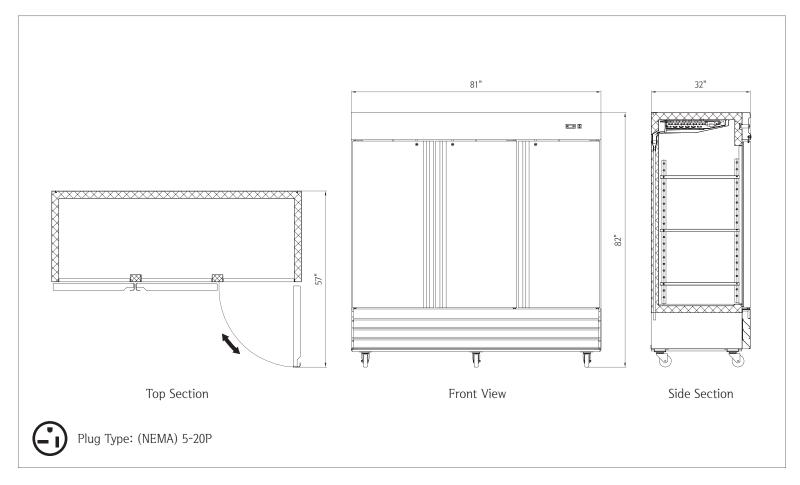

Capacity		
Capacity	72 cu. ft.	
Dimensions		
Internal Cabinet Width	76 in	
Internal Cabinet Depth	27 in	
Internal Cabinet Height	60 in	
External Width	81 in	
External Depth	32 in	
External Height	82 in	
Shipping Dimensions (W $x$ D $x$ H)	83 x 34 x 84 in	
Weight		
Gross Weight	709 lbs.	

Acces	sories
Cycle Defrosting	Yes
Frost Free	Yes
Adjustable Shelves	9
Fixed Shelves	No
Internal Light	Yes
Internal Light Switch	No
External Light Switch	No
Self Closing Door/Lid	Yes
Door Holder for Loading	Yes
Door/Lid Lock	Yes
Reversable (Left) Door	Yes
Adjustable Feet	Optional
Adjustable Thermostat	Yes